

# Technical and Non-Technical Applications of Evolving Takagi-Sugeno-Kang Fuzzy Models

Radu-Emil Precup, *Senior Member, IEEE*, Stefan Preitl, *Senior Member, IEEE*,  
Claudia-Adina Bojan-Drăgos, *Member, IEEE*, Mircea-Bogdan Radac, *Member, IEEE*,  
Alexandra-Iulia Szedlak-Stinean, *Member, IEEE*, Elena-Lorena Hedrea and  
Raul-Cristian Roman, *Student Member, IEEE*

**Abstract**—This paper presents a part of the results obtained by the Process Control group of the Politehnica University of Timisoara, Romania, in the field of evolving Takagi-Sugeno-Kang fuzzy models. These results concern the development of Takagi-Sugeno-Kang fuzzy models by incremental online algorithms for the description of the dynamics or static behavior of three technical and non-technical system applications, namely magnetic levitation systems, Anti-lock Braking Systems and automated translation.

**Index Terms**—Anti-lock Braking Systems; automated translation; evolving Takagi-Sugeno-Kang fuzzy models; magnetic levitation systems.

## I. INTRODUCTION

THE specific feature of evolving Takagi-Sugeno-Kang fuzzy models is obtaining the rules in the rule bases of these fuzzy systems by a learning process, i.e., by continuous online rule base learning as shown in the representative papers [1]–[10]. The Takagi-Sugeno-Kang fuzzy models are obtained by evolving the model structure and parameters making use of online identification algorithms. The so-called adding mechanism plays an important role in online identification algorithms because it adds new local models or removes them, thus ensuring the evolving structure and parameters.

A very useful classification of online identification algorithms that compute evolving Takagi-Sugeno-Kang fuzzy models is given in [11]. This classification highlights three categories of online identification algorithms, namely I, II and III, which are briefly outlined as follows by means of their specific features.

The category I of adaptive algorithms starts with the initial structure of the Takagi-Sugeno-Kang fuzzy model, given by other algorithms or by the experience of the specialist in the modeling or operation of the nonlinear dynamic system that is modeled. The number of space partitions/clusters does not change over time, and these algorithms adapt just the parameters of the membership functions and the local models.

Radu-Emil Precup, Stefan Preitl, Claudia-Adina Bojan-Drăgos, Mircea-Bogdan Radac, Alexandra-Iulia Szedlak-Stinean, Elena-Lorena Hedrea and Raul-Cristian Roman are with the Department of Automation and Applied Informatics, Politehnica University of Timisoara, Bd. V. Parvan 2, 300223 Timisoara, Romania (e-mails: radu.precup@upt.ro, stefan.preitl@upt.ro, claudia.dragos@upt.ro, mircea.radac@upt.ro, alexandra-iulia.stinean@aut.upt.ro, elena.constantin@student.upt.ro, raul-cristian.roman@student.upt.ro).

The category II is represented by the incremental algorithms. Some representative examples of incremental algorithms are RAN [12], [13], SONFIN [14], [15], NeuroFAST [16], [17], DENFIS [18], [19], SCFNN [20], [21], eTS [22], [23], FLEXFIS [24], [25], and PANFIS [26]. They implement just adding mechanisms.

The category III consists of evolving algorithms. Besides the adding mechanism, these algorithms also implement removing and a part of these algorithms merging and splitting mechanisms.

This paper is built on the basis of the recent results obtained by the Process Control group of the Politehnica University of Timisoara, Romania, in the development of evolving Takagi-Sugeno-Kang fuzzy models obtained by incremental algorithms (the category II described above). The paper is the continuation of the paper [27], which offers real-world applications of evolving Takagi-Sugeno-Kang fuzzy models that describe the dynamics of nonlinear systems in crane systems [28], [29], pendulum systems [30], [31], prosthetic hand fingers [32] and twin rotor aerodynamic systems [33]. This paper applies incremental online identification algorithms to develop evolving Takagi-Sugeno-Kang fuzzy models for other technical and non-technical system applications in order to describe their dynamics or static behavior: the position of the magnetic sphere in laboratory magnetic levitation systems [34], the longitudinal slip in laboratory Anti-lock Braking Systems (ABSs) [35], and the overall paragraph score in automated translation [36].

The evolving fuzzy models treated in this paper are important because they can be next used in control. Relevant process and control applications are presented in [37]–[44], with crisp and fuzzy models [45]–[50], and the online identification algorithms must be adapted accordingly.

This paper treats the following topics: an overview on incremental online identification algorithms is presented in Section II. Useful implementation details and results on the three evolving fuzzy model applications are offered in Section III. The conclusions are pointed out in Section IV.

## II. INCREMENTAL ONLINE IDENTIFICATION ALGORITHMS

The classical version of the incremental online identification algorithm is implemented using the theoretical aspects described in [27] and [33] in terms of the software support of eFS Lab presented in [51] and [52]. The flowchart

of the basic version of incremental online identification algorithm is presented in Fig. 1, where TSK stands for Takagi-Sugeno-Kang. This algorithm consists of seven steps described as follows; they are also presented in [27] and [33].

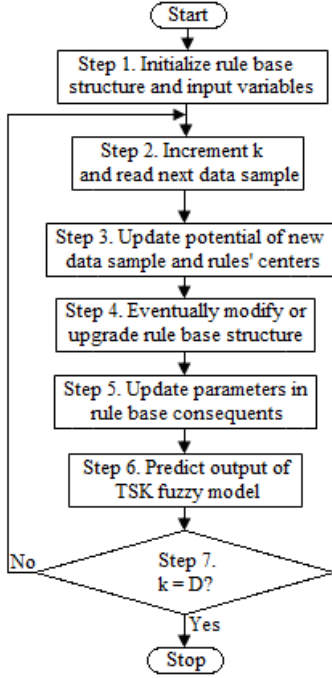


Fig. 1. Flowchart of classical version of incremental online identification algorithm [27].

*Step 1.* The rule base structure is initialized by setting all parameters of rule antecedents such that to initially contain just one rule, namely  $n_R = 1$ , where  $n_R$  is the number of rules. The subtractive clustering is next applied to compute the parameters of the evolving Takagi-Sugeno-Kang fuzzy models using the first data point  $\mathbf{p}_1$ , with the general expression [22] of the data point  $\mathbf{p}$  in the input-output data set at the discrete time step  $k$ , with the notation  $\mathbf{p}_k$ :

$$\mathbf{p}_k = [p_k^1 \ p_k^2 \ \dots \ p_k^{n+1}]^T, \ \mathbf{p} = [\mathbf{z}^T \ y]^T = [z_1 \ z_2 \ \dots \ z_n \ y]^T = [p^1 \ p^2 \ \dots \ p^n \ p^{n+1}]^T \in \mathfrak{R}^{n+1}, \quad (1)$$

where  $T$  stands for matrix transposition.

The expression of the input-output data set is:

$$\{\mathbf{p}_k \mid k = 1 \dots D\} \subset \mathfrak{R}^{n+1}, \quad (2)$$

and  $D$  is the number of input-output data points or data points or data samples or samples.

The rule base of Takagi-Sugeno-Kang fuzzy models with affine rule consequents, also called first-order Sugeno fuzzy inference systems in some software programs and toolboxes implementations, is:

$$\text{Rule } i: \text{IF } z_1 \text{ IS } LT_{i1} \text{ AND } \dots \text{ AND } z_n \text{ IS } LT_{in} \text{ THEN } y_i = a_{i0} + a_{i1}z_1 + \dots + a_{in}z_n, i = 1 \dots n_R, \quad (3)$$

where  $z_j, j = 1 \dots n$ , are the input variables,  $n$  is the number of input variables,  $LT_{ij}, i = 1 \dots n_R, j = 1 \dots n$ , are the input linguistic terms,  $y_i$  is the output of the local model in the rule consequent of the rule with the index  $i, i = 1 \dots n_R$ , and  $a_{il}, i = 1 \dots n_R, l = 0 \dots n$ , are the parameters in the rule consequents.

The Takagi-Sugeno-Kang fuzzy model structure considered in this paper includes the algebraic product t-norm as an AND operator and the weighted average defuzzification method. This leads to the expression of the output  $y$  of the Takagi-Sugeno-Kang fuzzy model:

$$y = \frac{\sum_{i=1}^{n_R} \tau_i y_i}{\sum_{i=1}^{n_R} \tau_i} = \sum_{i=1}^{n_R} \lambda_i y_i, \ y_i = [1 \ \mathbf{z}^T] \boldsymbol{\pi}_i, \quad (4)$$

$$\lambda_i = \tau_i / \left[ \sum_{i=1}^{n_R} \tau_i \right], \ i = 1 \dots n_R,$$

where the firing degree of the rule  $i$  and the normalized firing degree of the rule  $i$  are  $\tau_i(\mathbf{z})$  and  $\lambda_i$ , respectively, and the parameter vector of the rule  $i$  is  $\boldsymbol{\pi}_i, i = 1 \dots n_R$ . The expression of the firing degree is:

$$\tau_i(\mathbf{z}) = \text{AND}(\mu_{i1}(z_1), \mu_{i2}(z_2), \dots, \mu_{in}(z_n)) = \mu_{i1}(z_1) \cdot \mu_{i2}(z_2) \cdot \dots \cdot \mu_{in}(z_n), \ i = 1 \dots n_R, \quad (5)$$

and the expression of the parameter vector is:

$$\boldsymbol{\pi}_i = [a_{i0} \ a_{i1} \ \dots \ a_{in}]^T, \ i = 1 \dots n_R. \quad (6)$$

The other parameters specific to the incremental online identification algorithm are initialized as follows using [22]:

$$\hat{\boldsymbol{\theta}}_1 = [(\boldsymbol{\pi}_1^T)_1 \ (\boldsymbol{\pi}_2^T)_1 \ \dots \ (\boldsymbol{\pi}_{n_R}^T)_1]^T = [0 \ 0 \ \dots \ 0]^T, \quad (7)$$

$$\mathbf{C}_1 = \Omega \mathbf{I}, \ r_s = 0.4, \ k = 1, \ n_R = 1, \ \mathbf{z}_1^* = \mathbf{z}_k, \ P_1(\mathbf{p}_1^*) = 1,$$

where  $\mathbf{C}_k \in \mathfrak{R}^{n_R(n+1) \times n_R(n+1)}$  is the fuzzy covariance matrix related to the clusters,  $\mathbf{I}$  is the  $n_R(n+1)$ <sup>th</sup> order identity matrix,  $\Omega = \text{const}, \Omega > 0$ , is a large number,  $\hat{\boldsymbol{\theta}}_k$  is an estimation of the parameter vector in the rule consequents at the discrete time step  $k$ , and  $r_s, r_s > 0$ , is the spread of all Gaussian input membership functions  $\mu_{ij}, i = 1 \dots n_R, j = 1 \dots n$ , of the fuzzy sets of the input linguistic terms  $LT_{ij}$ :

$$\mu_{ij}(z_j) = \exp[-(4/r_s^2)(z_j - z_{ij}^*)^2], \ i = 1 \dots n_R, \ j = 1 \dots n, \quad (8)$$

$z_{ij}^*, i = 1 \dots n_R, j = 1 \dots n$ , are the membership function centers,  $\mathbf{p}_1^*$  in (7) is the first cluster center,  $\mathbf{z}_1^*$  is the center of the rule 1 and also the projection of  $\mathbf{p}_1^*$  on the axis  $\mathbf{z}$  in terms of (1), and  $P_1(\mathbf{p}_1^*)$  is the potential of  $\mathbf{p}_1^*$ .

Other membership functions will lead to different results and will require the modification of the next steps of the algorithm. However, the membership functions given in (8) are differentiable and make these models applicable to data-driven fuzzy control.

*Step 2.* The data sample index  $k$  is incremented to  $k+1$ , and the next data sample  $\mathbf{p}_k$  that belongs to the input-output data set defined in (2) is read.

*Step 3.* The potential of each new data sample  $P_k(\mathbf{p}_k)$  and the potentials of the centers  $P_k(\mathbf{p}_l^*)$  of existing rules (clusters) with the index  $l$  are recursively updated:

$$\begin{aligned} P_k(\mathbf{p}_k) &= (k-1)/[(k-1)(\vartheta_k+1) + \sigma_k - 2\nu_k], \\ \vartheta_k &= \sum_{j=1}^{n+1} (p_k^j)^2, \sigma_k = \sum_{j=1}^{n+1} \sum_{l=1}^{k-1} (p_l^j)^2, \nu_k = \sum_{j=1}^{n+1} (P_k^j \sum_{l=1}^{k-1} P_l^j), \\ P_k(\mathbf{p}_l^*) &= (k-1)P_{k-1}(\mathbf{p}_l^*)/[k-2+P_{k-1}(\mathbf{p}_l^*) \\ &+ P_{k-1}(\mathbf{p}_l^*) \sum_{j=1}^{n+1} (d_{k(k-1)}^j)^2]. \end{aligned} \quad (9)$$

*Step 4.* The possible modification or upgrade of the rule base structure is carried out by means of the potential of the new data compared to the potential of the existing rules' centers. The rule base structure is modified if certain conditions mentioned in [22] and [27]–[36] are fulfilled.

*Step 5.* The parameters in the rule consequents are updated using either the Recursive Least Squares (RLS) algorithm or the weighted Recursive Least Squares (wRLS) algorithm. These updates result in the updated vectors  $\hat{\boldsymbol{\theta}}_k$  and  $\mathbf{C}_k$ ,  $k = 2 \dots D$ .

*Step 6.* The output of the evolving Takagi-Sugeno-Kang fuzzy model at the next discrete time step  $k+1$  is predicted as  $\hat{y}_{k+1}$ :

$$\hat{y}_{k+1} = \boldsymbol{\Psi}_k^T \hat{\boldsymbol{\theta}}_k, \quad (10)$$

where the general expression of (10) and the expressions of the vectors are:

$$\begin{aligned} y &= \boldsymbol{\Psi}^T \boldsymbol{\theta}, \boldsymbol{\theta} = [\boldsymbol{\pi}_1^T \quad \boldsymbol{\pi}_2^T \quad \dots \quad \boldsymbol{\pi}_{n_r}^T]^T, \\ \boldsymbol{\Psi}^T &= [\lambda_1 [1 \quad \mathbf{z}^T] \quad \lambda_2 [1 \quad \mathbf{z}^T] \quad \dots \quad \lambda_{n_r} [1 \quad \mathbf{z}^T]]. \end{aligned} \quad (11)$$

*Step 7.* The algorithm continues with the step 2 until all data points of the input-output data set presented in (2) are read.

The incremental online identification algorithm described in this section has been modified in [30] and [31] by adding and an input selection algorithm and a Gravitational Search Algorithm to replace RLS or wRLS in step 5 by updating the rule consequents. Other optimization algorithms can be used as well, with some classical and nature-inspired examples presented in [53]–[66].

Using the notation  $y_k$  for the output of the Takagi-Sugeno-Kang fuzzy models, the general expression of these models

evolved by the incremental online identification algorithm presented in this section is:

$$y_k = f(\mathbf{z}_k), \quad (12)$$

where  $f$  is the nonlinear input-output map of the Takagi-Sugeno-Kang fuzzy models.

### III. TECHNICAL AND NON-TECHNICAL APPLICATIONS

#### A. Magnetic Levitation Systems

The incremental online identification algorithm presented in the previous section has been applied to derive evolving Takagi-Sugeno-Kang fuzzy models of the sphere position in magnetic levitation system laboratory equipment. The experimental setup is illustrated in Fig. 2.

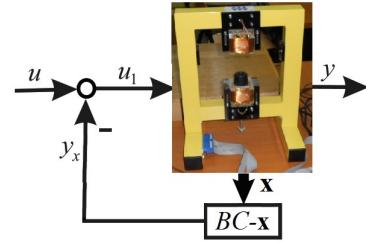


Fig. 2. Stabilized magnetic levitation system (experimental setup in the Intelligent Control Systems Laboratory of the Politehnica University of Timisoara, Romania) [34].

The laboratory equipment includes two electromagnets, the ferromagnetic sphere, the sensors to detect the position of the sphere, the computer interface, the drivers, the power supply unit, the connection cables, the acquisition board, and appropriate software support. If both electromagnets are used, the control signal applied to the lower electromagnet can be used as an additional force but it can also be used as a disturbance input. The main notations for this experimental setup are [34]:  $u_1$  (V) – the control signal applied to the upper electromagnet,  $\mathbf{x} = [x_1 \quad x_2 \quad x_3]^T$  – the state vector with the components  $x_1$  (m) – the sphere position,  $x_2$  (m/s) – the sphere speed,  $x_3$  (A) – the current in the upper electromagnet, and  $y = x_1$  (m) – the process output and also the output of the evolving Takagi-Sugeno-Kang fuzzy models.

The laboratory equipment is a nonlinear unstable system. Linearizing the process model at seven operating points, the process is next stabilized using a state-feedback control system as shown in Fig. 2, where BC-x is the state-feedback compensator, and  $y_x$  is the output of the block BC-x, obtained as a linear combination of the state variables. The notation  $u$  is used for the reference input of the stabilized state-feedback control system for which Takagi-Sugeno-Kang fuzzy models are evolved and derived, and also as an input variable to the evolving Takagi-Sugeno-Kang fuzzy models that are exemplified as follows.

Setting the sampling period to  $0.5 \cdot 10^{-3}$  s, the values of  $u$  have been generated in order to cover different ranges of

magnitudes and frequencies, and the output  $y$  has been measured from the equipment. The evolution of the system input versus time is presented in Fig. 3, which includes the input data for both training and validation (testing). The past input and output values have been obtained by shifting the training and validation data samples.

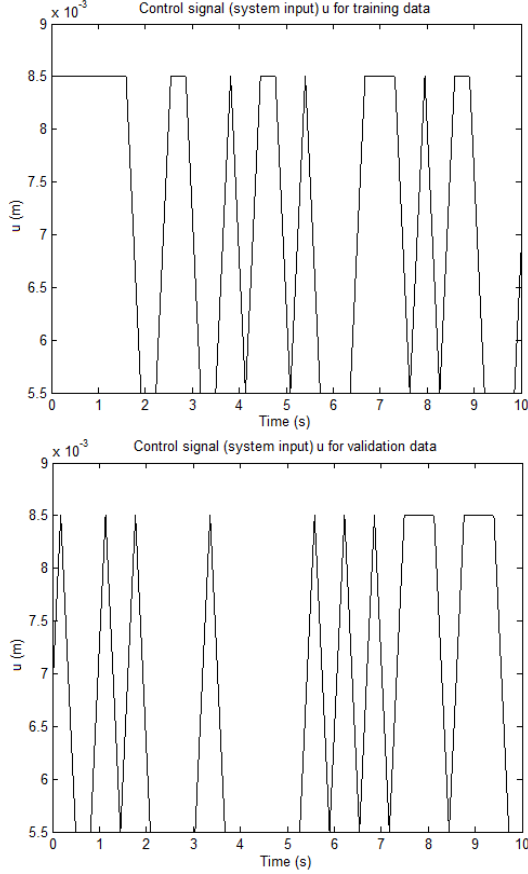


Fig. 3. System inputs of magnetic levitation system versus time: training data and validation (testing) data [34].

The input signal shown in Fig. 3 has been applied to the laboratory equipment to generate the input-output data points  $(z_k, y_k)$ ,  $k = 1 \dots D$ . Fig. 3 illustrates the inputs that correspond to the set of  $D = 20000$  data points of the training data and the inputs of the other set of  $D = 20000$  data points of the testing data. The output values will be next illustrated.

The value of the parameter  $\Omega$  in the step 1 has been set to  $\Omega = 10000$ . The dynamics is introduced in the evolving Takagi-Sugeno-Kang fuzzy models by inserting several past values of the input and/or output. The parameters in the rule consequents have been updated in the step 5 of the algorithm described in Section II using either RLS or wRLS.

The results presented in [34] show that the best performance as far as the root mean square error (RMSE) on the validation data is obtained by the Takagi-Sugeno-Kang fuzzy model with the input vector:

$$\mathbf{z}_k = [u_k \ y_{k-1}]^T \quad (13)$$

with RLS applied in the step 5. A sample of real-time experimental results is shown in Fig. 4 as the time responses of  $y$  versus time of this fuzzy model 4 and the real-world system.

This fuzzy model has evolved to 7 rules and has 49 parameters. The results show that a reduced number of model inputs is needed for this process in order to have acceptable model performance expressed, for example, in terms of RMSE.

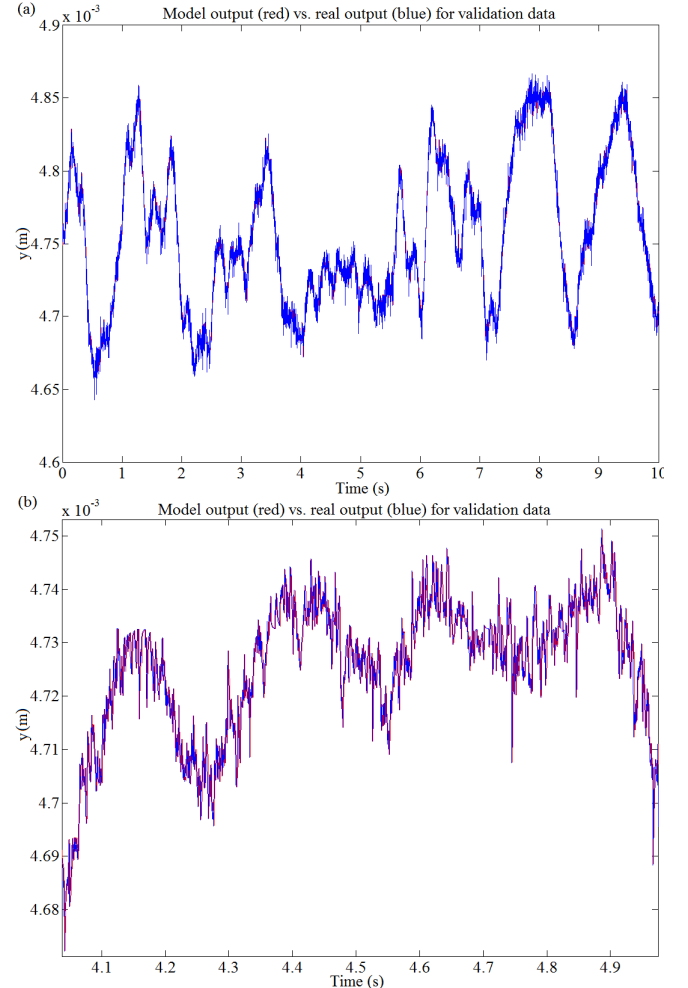


Fig. 4. (a) Sphere position  $y$  versus time of Takagi-Sugeno-Kang fuzzy model (red) and real-world system (blue) on the validation (testing) data set, (b) zoomed plots of sphere position versus time [34].

## B. Anti-lock Braking Systems

The continuous-time nonlinear state-space model of the ABS process is derived starting with [35], [67]:

$$\begin{aligned} J_1 \dot{x}_1 &= F_n r_1 \mu(\lambda) - d_1 x_1 - M_{10} - M_1, \\ J_2 \dot{x}_2 &= -F_n r_2 \mu(\lambda) - d_2 x_2 - M_{20}, \\ \dot{M}_1 &= c_{31} (b(u) - M_1), \end{aligned} \quad (14)$$

where  $\lambda$  is the longitudinal slip,  $J_1$  and  $J_2$  are the inertia moments of wheels illustrated in Fig. 5,  $x_1$  and  $x_2$  are the

angular velocities,  $d_1$  and  $d_2$  are the friction coefficients in the axes of the wheels,  $M_{10}$  and  $M_{20}$  are the static friction torques that oppose the normal rotation,  $M_1$  is the brake torque,  $r_1$  and  $r_2$  are the radii of wheels,  $F_n$  is the normal force that the upper wheel pushes upon the lower wheel,  $\mu(\lambda)$  is the friction coefficient,  $\dot{x}_1$  and  $\dot{x}_2$  are the angular accelerations of the wheels,  $u$  is the control signal applied to the actuator, namely the direct current (DC) motor which drives the upper wheel, and the actuator's nonlinear model is reflected in the nonlinear map  $b(u)$ .



Fig. 5. ABS experimental setup in the Intelligent Control Systems Laboratory of the Politehnica University of Timisoara, Romania [67].

The longitudinal slip  $\lambda$  is defined as:

$$\lambda = (r_2 x_2 - r_1 x_1) / (r_2 x_2), x_2 \neq 0, \quad (15)$$

the controlled output of the ABS process is  $\lambda$  in the context of longitudinal slip control, and the notation  $y = \lambda$  is employed in this sub-section for the sake of model development.

Setting the sampling period to 0.01s, several values of  $u$  have been generated in order to cover different ranges of magnitudes and frequencies. The output  $y = \lambda$  has been measured from the ABS equipment. The evolution of the system input versus time is presented in Fig. 6, which includes the input data for both training and validation (testing).

The input signal illustrated in Fig. 6 has been applied to the laboratory equipment to generate the input-output data points  $(z_k, y_k)$ ,  $k = 1 \dots D$ , needed to be applied to the algorithm. Fig. 6 outlines the inputs that correspond to the set of  $D = 240$  data points of the training data and the inputs of the other set of  $D = 60$  data points of the testing data. The output values computed by the Takagi-Sugeno-Kang fuzzy models and measured from the equipment will be presented as follows.

A part of the real-time experimental results is exemplified in Fig. 6 as the time responses of  $y$  versus time of the Takagi-Sugeno-Kang fuzzy model with the input vector

$$z_k = [u_k \ u_{k-1} \ y_{k-1} \ y_{k-2}]^T, \quad (16)$$

with wRLS applied in the step 5 of the incremental online identification algorithm, and the real-world ABS.

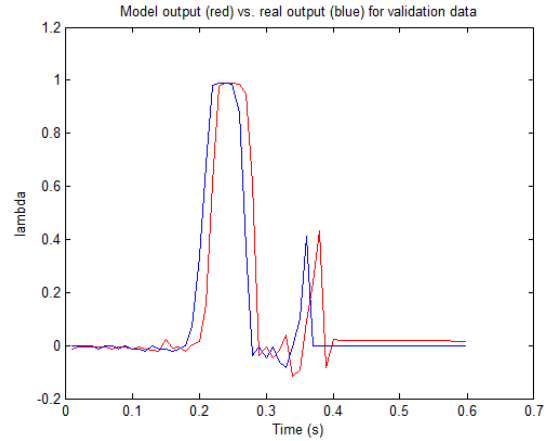


Fig. 6. (a) Longitudinal slip position  $y = \lambda$  versus time of Takagi-Sugeno-Kang fuzzy model (red) and real-world ABS (blue) on the validation (testing) data set [67].

This fuzzy model has evolved to 9 rules and has 117 identified parameters. The performance is acceptable, it can be improved but this is constrained by the number of data samples considered for this process, which is rather small.

### C. Automated Translation Systems

The problem considered in automated translation systems is defined as follows in terms of [36]: the text T1 in English will be translated into French with the help of an online translation memory software application. Google Translate and Systran have been used as representative online translation memory software applications in [26]. The translation leads to the text T2 in French. The text T2 is next introduced in the same application; it is translated into English leading to the result T3. T2 is compared T1 to T3 resulting in the degree of concordance between them by means of a statistical test. Fuzzy models have been evolved, which give the Overall Paragraph Score (OPS) viewed as the Takagi-Sugeno-Kang fuzzy model output, namely  $y_k = OPS_k$ , using  $n = 7$  categories of primary errors as input variables. The general expression of the input vector to the Takagi-Sugeno-Kang fuzzy models is:

$$z_k = [WT_k \ SE_k \ OM_k \ SA_k \ SP_k \ PE_k \ ME_k]^T, \quad (17)$$

where: WT – Wrong Term, SE – Syntactic Error, OM – Omission, SA – Word Structure and Agreement error, SP – MisSPelling, PE – Punctuation Error, and ME – Miscellaneous Error. The weights of these seven categories of primary errors categorized as serious errors/minor errors are given in [68].

The system inputs are presented in Fig. 7, which illustrates the input data for both training and validation (testing). The real system output is the actual value of OPS obtained by the application of Google Translate or Systran in the translation from English to French, which has been investigated in [36].



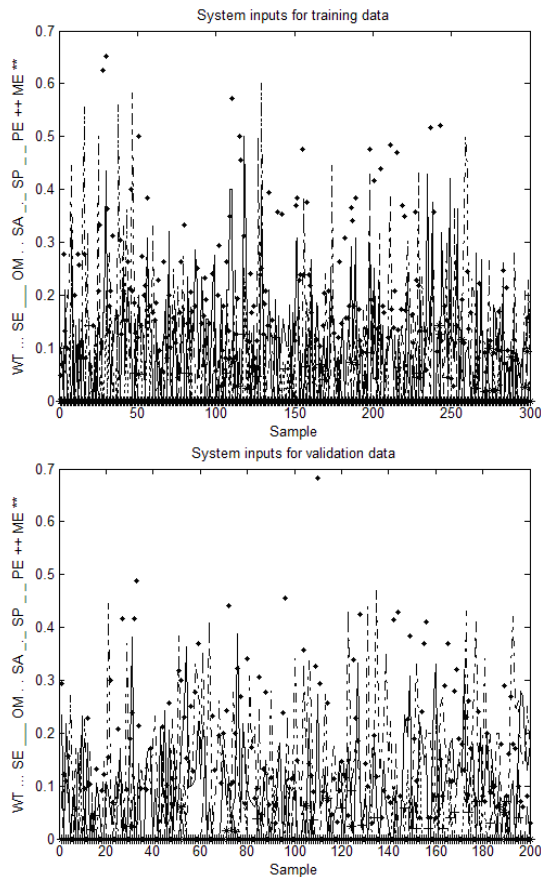


Fig. 7. System inputs of automated translation systems versus data sample for training data and validation (testing) data [36].

One of the evolved Takagi-Sugeno-Kang fuzzy models, which corresponds to Google Translate using wRLS in the step 5 of the algorithm given in the previous sections, has evolved to  $n_R = 6$  rules, and it consists of 132 parameters. The outputs of this fuzzy model and of the real system output are illustrated in Fig. 8 for validation (testing) data, and the results are encouraging.

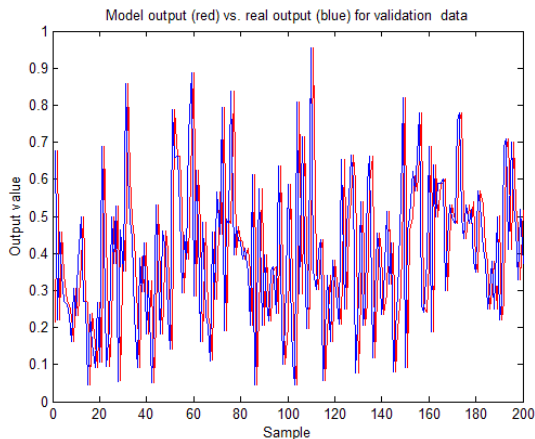


Fig. 8. System output (OPS) versus data sample of evolving Takagi-Sugeno-Kang fuzzy model and real system for validation (testing) data [36].

#### IV. CONCLUSION

This paper has presented some results obtained by the

Process Control group of the Politehnica University of Timisoara, Romania, in the application of evolving Takagi-Sugeno-Kang fuzzy models to three nonlinear systems. Two technical dynamical systems and one non-technical static system have been modeled. An incremental online identification algorithm organized in a cost-effective manner has been applied to produce the Takagi-Sugeno-Kang fuzzy models.

The performance of the Takagi-Sugeno-Kang fuzzy models, expressed as system responses and assessed by RMSE, is encouraging. But the performance is affected by the parameters of the incremental online identification algorithm, which leads to parametric sensitivity and eventually robustness problems.

Future research will be focused on the application of the Takagi-Sugeno-Kang fuzzy models to control these processes. This should be combined with the proper definition of the control goals.

#### ACKNOWLEDGMENT

This work was supported by grants of the Partnerships in priority areas – PN II program of the Romanian Ministry of National Education and Scientific Research – the Executive Agency for Higher Education, Research, Development and Innovation Funding (UEFISCDI), project numbers PN-II-PT-PCCA-2013-4-0544 and PN-II-PT-PCCA-2013-4-0070, and UEFISCDI, project number PN-II-RU-TE-2014-4-0207. The support of Dr. Alina Tenescu, University of Craiova, Romania, and Assoc. Prof. Nicusor Minculete, Transilvania University of Brasov, Romania, in the preparation of the datasets needed to the development and experimental validation of the evolving Takagi-Sugeno-Kang fuzzy models specific to the non-technical application.

#### REFERENCES

- [1] P. Angelov, *Evolving Rule based Models: A Tool for Design of Flexible Adaptive Systems*. Berlin, Heidelberg: Springer-Verlag, 2002.
- [2] M. Sayed Mouchaweh, A. Devillez, G. Villerman Lecolier, and P. Billaudel, "Incremental learning in fuzzy pattern matching," *Fuzzy Sets Syst.*, vol. 132, no. 1, pp. 49–62, Nov. 2002.
- [3] P. X. Liu and M. Q.-H. Meng, "Online data-driven fuzzy clustering with applications to real-time robotic tracking," *IEEE Trans. Fuzzy Syst.*, vol. 12, no. 4, pp. 516–523, Aug. 2004.
- [4] W. Wang and J. Vrbanek, Jr., "An evolving fuzzy predictor for industrial applications," *IEEE Trans. Fuzzy Syst.*, vol. 16, no. 6, pp. 1439–1449, Dec. 2008.
- [5] E. Lughofer, *Evolving Fuzzy Systems - Methodologies, Advanced Concepts and Applications*. Berlin, Heidelberg: Springer-Verlag, 2011.
- [6] D. Dovžan and I. Škrjanc, "Recursive clustering based on a Gustafson-Kessel algorithm," *Evolving Syst.*, vol. 2, no. 1, pp. 15–24, Mar. 2011.
- [7] E. Lughofer, "On-line assurance of interpretability criteria in evolving fuzzy systems - achievements, new concepts and open issues," *Inform. Sci.*, vol. 251, pp. 22–46, Dec. 2013.
- [8] R.-E. Precup, P. Angelov, B. S. J. Costa, and M. Sayed-Mouchaweh, "An overview on fault diagnosis and nature-inspired optimal control of industrial process applications," *Comput. Ind.*, vol. 74, pp. 75–94, Dec. 2015.
- [9] D. Kangin, P. Angelov, and J. A. Iglesias, "Autonomously evolving classifier TEDAClass," *Inform. Sci.*, vol. 366, pp. 1–11, Oct. 2016.
- [10] C. Za'in, M. Pratama, E. Lughofer, and S. G. Anavatti, "Evolving type-2 web news mining," *Appl. Soft Comput.*, vol. 54, pp. 200–220, May 2017.

- [11] D. Dovžan, V. Logar, and I. Škrjanc, "Implementation of an evolving Fuzzy Model (eFuMo) in a monitoring system for a waste-water treatment process," *IEEE Trans. Fuzzy Syst.*, vol. 23, no. 5, pp. 1761–1776, Oct. 2015.
- [12] J. Platt, "A resource allocating network for function interpolation," *Neural Comput.*, vol. 3, no. 2, pp. 213–225, June 1991.
- [13] S. H. A. Ali, S. Ozawa, T. Ban, J. Nakazato, and J. Shimamura, "A neural network model for detecting DDoS attacks using darknet traffic features," in *Proc. 2016 International Joint Conference on Neural Networks*, Vancouver, BC, Canada, 2016, pp. 2979–2985.
- [14] C.-F. Juang and C.-T. Lin, "An on-line self-constructing neural fuzzy inference network and its applications," *IEEE Trans. Fuzzy Syst.*, vol. 6, no. 1, pp. 12–32, Feb. 1998.
- [15] M. Prasad, C.-T. Lin, D.-L. Li, C.-T. Hong, W.-P. Ding, and J.-Y. Chang, "Soft-boosted self-constructing neural fuzzy inference network," *IEEE Trans. Syst., Man, Cybern., Syst.*, vol. 47, no. 3, pp. 584–588, Mar. 2017.
- [16] S. G. Tzafestas and K. C. Zikidis, "NeuroFAST: On-line neuro-fuzzy ART-based structure and parameter learning TSK model," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 31, no. 5, pp. 797–802, Oct. 2001.
- [17] S. G. Tzafestas and K. C. Zikidis, "NeuroFAST: high accuracy neuro-fuzzy modeling," in *Proc. 2002 IEEE International Conference on Artificial Intelligence Systems*, Geelong, Australia, 2002, pp. 228–235.
- [18] N. K. Kasabov and Q. Song, "DENFIS: Dynamic Evolving Neural-Fuzzy Inference System and its application for time-series prediction," *IEEE Trans. Fuzzy Syst.*, vol. 10, no. 2, pp. 144–154, Apr. 2002.
- [19] L. S. Riza, C. Bergmeir, F. Herrera, and J. M. Benitez, "Learning from data using the R package "FRBS"," in *Proc. 2014 IEEE International Conference on Fuzzy Systems*, Beijing, China, 2014, pp. 2149–2155.
- [20] F.-J. Lin, C.-H. Lin, and P.-H. Shen, "Self-constructing fuzzy neural network speed controller for permanent-magnet synchronous motor drive," *IEEE Trans. Fuzzy Syst.*, vol. 9, no. 5, pp. 751–759, Aug. 2002.
- [21] N. Wang and M. J. Er, "Self-constructing adaptive robust fuzzy neural tracking control of surface vehicles with uncertainties and unknown disturbances," *IEEE Trans. Control Syst. Technol.*, vol. 23, no. 3, pp. 991–1002, May 2015.
- [22] P. Angelov and D. Filev, "An approach to online identification of Takagi-Sugeno fuzzy models," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 34, no. 1, pp. 484–498, Feb. 2004.
- [23] M. Moshtaghi, J. C. Bezdek, C. Leckie, S. Karunasekera, and M. Palaniswami, "Evolving fuzzy rules for anomaly detection in data streams," *IEEE Trans. Fuzzy Syst.*, vol. 23, no. 3, pp. 688–700, June 2015.
- [24] E. Lughofer and E. P. Klement, "FLEXFIS: A variant for incremental learning of Takagi-Sugeno fuzzy systems," in *Proc. 14<sup>th</sup> IEEE International Conference on Fuzzy Systems*, Reno, NV, USA, 2005, pp. 915–920.
- [25] B.-K. Xie and S.-J. Lee, "A modified scheme for all-pairs evolving fuzzy classifiers," in *Proc. 2014 International Conference on Machine Learning and Cybernetics*, Lanzhou, China, 2014, vol. 2, pp. 573–578.
- [26] M. Pratama, S. G. Anavatti, P. Angelov, and E. Lughofer, "PANFIS: A novel incremental learning machine," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 25, no. 1, pp. 55–68, Jan. 2014.
- [27] R.-E. Precup, S. Preitl, C.-A. Bojan-Dragos, M.-B. Radac, A.-I. Szedlak-Stinean, E.-L. Hedrea, and R.-C. Roman, "Evolving Takagi-Sugeno fuzzy modeling applications of incremental online identification algorithms," in *Proc. XIII International SAUM Conference on Systems, Automatic Control and Measurements*, Niš, Serbia, 2016, pp. 3–10.
- [28] R.-E. Precup, H.-I. Filip, M.-B. Radac, C. Pozna, C.-A. Dragos, and S. Preitl, "Experimental results of evolving Takagi-Sugeno fuzzy models for a nonlinear benchmark," in *Proc. 2012 IEEE 3<sup>rd</sup> International Conference on Cognitive Infocommunications*, Kosice, Slovakia, 2012, pp. 567–572.
- [29] R.-E. Precup, H.-I. Filip, M.-B. Radac, E. M. Petriu, S. Preitl, and C.-A. Dragos, "Online identification of evolving Takagi-Sugeno-Kang fuzzy models for crane systems," *Appl. Soft Comput.*, vol. 24, pp. 1155–1163, Nov. 2014.
- [30] R.-E. Precup, E.-I. Voisan, E. M. Petriu, M.-B. Radac, and L.-O. Fedorovici, "Implementation of evolving fuzzy models of a nonlinear process," in *Proc. 12<sup>th</sup> International Conference on Informatics in Control, Automation and Robotics*, Colmar, France, 2015, vol. 1, pp. 5–14.
- [31] R.-E. Precup, E.-I. Voisan, E. M. Petriu, M.-B. Radac, and L.-O. Fedorovici, "Gravitational search algorithm-based evolving fuzzy models of a nonlinear process," in *Informatics in Control, Automation and Robotics*, J. Filipe, K. Madani, O. Gusikhin, and J. Sasiadek, Eds. Cham: Springer International Publishing, Lecture Notes in Electrical Engineering, vol. 383, pp. 51–62, 2016.
- [32] R.-E. Precup, T.-A. Teban, T. E. Alves de Oliveira, and E. M. Petriu, "Evolving fuzzy models for myoelectric-based control of a prosthetic hand," in *Proc. 2016 IEEE International Conference on Fuzzy Systems*, Vancouver, BC, Canada, 2016, pp. 72–77.
- [33] R.-E. Precup, M.-B. Radac, E. M. Petriu, R.-C. Roman, T.-A. Teban, and A.-I. Szedlak-Stinean, "Evolving fuzzy models for the position control of twin rotor aerodynamic systems," in *Proc. 2016 IEEE 14<sup>th</sup> International Conference on Industrial Informatics*, Poitiers, France, 2016, pp. 237–242.
- [34] R.-E. Precup, C.-A. Bojan-Dragos, E.-L. Hedrea, M.-D. Rarinca, and E. M. Petriu, "Evolving fuzzy models for the position control of magnetic levitation systems," in *Proc. 2017 IEEE Conference on Evolving and Adaptive Intelligent Systems*, Ljubljana, Slovenia, 2017, pp. 1–6.
- [35] R.-E. Precup, C.-A. Bojan-Dragos, E.-L. Hedrea, I. D. Borlea, and E. M. Petriu, "Evolving fuzzy models for anti-lock braking systems," in *Proc. 2017 IEEE International Conference on Computational Intelligence and Virtual Environments for Measurement Systems and Applications*, Annecy, France, 2017, pp. 1–6.
- [36] A. Tenescu, R.-E. Precup, and N. Minculete, "Evolving fuzzy models for automated translation," *Acta Polytech. Hung.*, vol. 14, no. 2, pp. 27–46, Apr. 2017.
- [37] S. Preitl and R.-E. Precup, "On the algorithmic design of a class of control systems based on providing the symmetry of open-loop Bode plots," *Scientific Bulletin of UPT, Transactions on Automatic Control and Computer Science*, vol. 41 (55), no. 2, pp. 47–55, Dec. 1996.
- [38] R.-E. Precup and S. Preitl, "Popov-type stability analysis method for fuzzy control systems," in *Proc. Fifth European Congress on Intelligent Technologies and Soft Computing*, Aachen, Germany, 1997, vol. 2, pp. 1306–1310.
- [39] I. Škrjanc, S. Blažič, and D. Matko, "Direct fuzzy model-reference adaptive control," *Int. J. Intell. Syst.*, vol. 17, no. 10, pp. 943–963, Oct. 2002.
- [40] P. Baranyi, D. Tikk, Y. Yam, and R. J. Patton, "From differential equations to PDC controller design via numerical transformation," *Comput. Ind.*, vol. 51, no. 3, pp. 281–297, Aug. 2003.
- [41] K. Veszprémi and K. Lamár, "Accuracy analysis of digitally implemented field orientation of induction motor drive," in *Proc. 15<sup>th</sup> International Conference on Electrical Drives and Power Electronics*, Podbanské, Slovakia, 2003, pp. 497–502.
- [42] Č. Milosavljević, B. Peruničić-Draženović, B. Veselić, and D. Mitić, "A new design of servomechanism with digital sliding mode," *Electr. Eng.*, vol. 89, no. 3, pp. 233–244, Jan. 2007.
- [43] F. G. Filip, "Decision support and control for large-scale complex systems," *Annual Rev. Control*, vol. 32, no. 1, pp. 61–70, Apr. 2008.
- [44] D. Antić, M. Milojković, Z. Jovanović, and S. Nikolić, "Optimal design of the fuzzy sliding mode control for a DC servo drive," *Strojniški vestnik – J. Mech. Eng.*, vol. 56, no. 7–8, pp. 455–463, Dec. 2010.
- [45] S. Nikolić, D. Antić, B. Danković, M. Milojković, Z. Jovanović, and S. Perić, "Orthogonal functions applied in antenna positioning," *Adv. Electr. Comput. Eng.*, vol. 10, no. 4, pp. 35–42, Dec. 2010.
- [46] J. Vaščák and K. Hirota, "Integrated decision-making system for robot soccer," *J. Adv. Comput. Intell. Intell. Informat.*, vol. 15, no. 2, pp. 156–163, Mar. 2011.
- [47] J.-S. Chiou and S.-H. Tsai, "Stability and stabilization of Takagi-Sugeno fuzzy switched system with time-delay," *Proc. Inst. Mech. Eng., Part I, J. Syst. Control Eng.*, vol. 226, no. 5, pp. 615–621, May 2012.
- [48] R.-E. Precup, M.-B. Radac, M. L. Tomescu, E. M. Petriu, and S. Preitl, "Stable and convergent iterative feedback tuning of fuzzy controllers for discrete-time SISO systems," *Expert Syst. Appl.*, vol. 40, no. 1, pp. 188–199, Jan. 2013.
- [49] L. Horváth and I. J. Rudas, "Active knowledge for the situation-driven control of product definition," *Acta Polytech. Hung.*, vol. 10, no. 2, pp. 217–234, Apr. 2013.
- [50] Č. Milosavljević, B. Peruničić-Draženović, and B. Veselić, "Discrete-time velocity servo system design using sliding mode control approach with disturbance compensation," *IEEE Trans. Ind. Informat.*, vol. 9, no. 2, pp. 920–927, May 2013.
- [51] J. V. Ramos and A. Dourado, "On line interpretability by rule base simplification and reduction," in *Proc. European Symposium on Intelligent Technologies, Hybrid Systems and Their Implementation on*

- Smart Adaptive Systems EUNITE 2004*, Aachen, Germany, 2004, pp. 1–6.
- [52] L. Aires, J. Araújo, and A. Dourado, “Industrial monitoring by evolving fuzzy systems,” in *Proc. Joint 2009 IFSA World Congress and 2009 EUSFLAT Conference*, Lisbon, Portugal, 2009, pp. 1358–1363.
- [53] D. Martín, R. Del Toro, R. Haber, and J. Dorronsoro, “Optimal tuning of a networked linear controller using a multi-objective genetic algorithm and its application to one complex electromechanical process,” *Int. J. Innov. Comput. Informat. Control*, vol. 5, no. 10 (B), pp. 3405–3414, Oct. 2009.
- [54] R.-E. Precup, R.-C. David, E. M. Petriu, S. Preitl, and M.-B. Radac, “Novel adaptive charged system search algorithm for optimal tuning of fuzzy controllers,” *Expert Syst. Appl.*, vol. 41, no. 4, pp. 1168–1175, Mar. 2014.
- [55] R.-E. Precup, M.-C. Sabau, and E. M. Petriu, “Nature-inspired optimal tuning of input membership functions of Takagi-Sugeno-Kang fuzzy models for anti-lock braking systems,” *Appl. Soft. Comput.*, vol. 27, pp. 575–589, Feb. 2015.
- [56] O. Arsene, I. Dumitrache, and I. Mihu, “Expert system for medicine diagnosis using software agents,” *Expert Syst. Appl.*, vol. 42, no. 4, pp. 1825–1834, Mar. 2015.
- [57] A. Moharam, M. A. El-Hosseini, and H. A. Ali, “Design of optimal PID controller using NSGA-II algorithm and level diagram,” *Stud. Informat. Control*, vol. 24, no. 3, pp. 301–308, Sep. 2015.
- [58] E. Osaba, E. Onieva, F. Dia, R. Carballedo, P. Lopez, and A. Perallos, “A migration strategy for distributed evolutionary algorithms based on stopping non-promising subpopulations: A case study on routing problems,” *Int. J. Artif. Intell.*, vol. 13, no. 2, pp. 46–56, Oct. 2015.
- [59] K. W. Derr and M. Manic, “Wireless sensor networks - node localization for various industry problems,” *IEEE Trans. Ind. Informat.*, vol. 11, no. 3, pp. 752–762, June 2015.
- [60] J. K. Tar, J. F. Bitó, and I. J. Rudas, “Contradiction resolution in the adaptive control of underactuated mechanical systems evading the framework of optimal controllers,” *Acta Polyt. Hung.*, vol. 13, no. 1, pp. 97–121, Jan. 2016.
- [61] F. Gaxiola, P. Melin, F. Valdez, J. R. Castro, and O. Castillo, “Optimization of type-2 fuzzy weights in backpropagation learning for neural networks using GAs and PSO,” *Appl. Soft Comput.*, vol. 38, pp. 860–871, Jan. 2016.
- [62] K. Michail, K. M. Deliparaschos, S. G. Tzafestas, and A. C. Zolotas, “AI-based actuator/sensor fault detection with low computational cost for industrial applications,” *IEEE Trans. Control Syst. Technol.*, vol. 24, no. 1, pp. 293–301, Jan. 2016.
- [63] S. B. Ghosn, F. Drouby, and H. M. Harmanani, “A parallel genetic algorithm for the open-shop scheduling problem using deterministic and random moves,” *Int. J. Artif. Intell.*, vol. 14, no. 1, pp. 130–144, Mar. 2016.
- [64] Q. Qin, S. Cheng, Q. Zhang, L. Li, and Y. Shi, “Particle swarm optimization with interswarm interactive learning strategy,” *IEEE Trans. Cybern.*, vol. 46, no. 10, pp. 2238–2251, Oct. 2016.
- [65] D. Azar, K. Fayad, and C. Daoud, “A combined ant colony optimization and simulated annealing algorithm to assess stability and fault-proneness of classes based on internal software quality attributes,” *Int. J. Artif. Intell.*, vol. 14, no. 2, pp. 137–156, Oct. 2016.
- [66] A. Fakharian and R. Rahmani, “An optimal controlling approach for voltage regulation and frequency stabilization in islanded microgrid system,” *Control Eng. Appl. Informat.*, vol. 18, no. 4, pp. 107–114, Dec. 2016.
- [67] R.-E. Precup, M.-C. Sabau, C.-A. Dragos, M.-B. Radac, L.-O. Fedorovici, and E. M. Petriu, “Particle swarm optimization of fuzzy models for anti-lock braking systems,” in *Proc. 2014 IEEE Conference on Evolving and Adaptive Intelligent Systems*, Linz, Austria, 2014, pp. 1–6.
- [68] SAE, Surface Vehicle Recommended Practice, [http://www.apex-translations.com/documents/sae\\_j2450.pdf](http://www.apex-translations.com/documents/sae_j2450.pdf), 2001.